




STINGER

FEATURE-PACKED EFFECT MACHINE

- 6° BEAM ANGLE
- CONTINUOUS MOVEMENTS
- INDIVIDUAL CONTROLLABLE LEDES
- STAR EFFECT
- ART-NET CONTROLLABLE PIXEL EFFECTS
- REFLECTOR MODULE ON BACKSIDE
- LOW NOISE CONTROLLABLE FAN

The Stinger is a feature-packed moving head. 36 RGBW, pixel controllable, high output LEDs provide many creative possibilities. A 6° punchy beam angle ensures impressive mid-air effects. The additional 49 CW LED star effect and the reflector module on the backside make the Stinger the ultimate multi effect LED fixture. Matrix effects can be controlled by Art-Net.

All features come in a rugged and touring-proof housing which can move continuously. The fixture can be rigged in any position by using the supplied omega bracket.

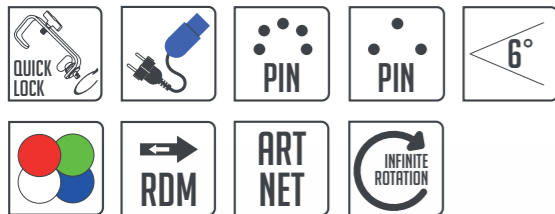

PHYSICAL	
LENGHT	466MM
WIDTH	246MM
HEIGHT (HEAD VERTICAL)	575MM
NET WEIGHT	20KG
EFFECTS	
COLOR	36 INDIVIDUAL CONTROLLABLE RGBW LEDES MACRO EFFECTS
STAR EFFECT	49 INDIVIDUAL CONTROLLABLE CW LEDES MACRO EFFECTS
SHUTTER	VARIABLE 0 - 100%, RANDOM & PULSE
DIMMER	0 - 100%
OPTICAL	
SOURCE	36X RGBW LEDES & 49 CW LEDES
BEAM ANGLE	6°
PHOTOMETRIC	
OUTPUT	25800 LX @ 5M
CONNECTIONS	
POWER	POWERCON IN AND OUT
DATA	3 AND 5 PIN LOCKING XLR, RJ45
CONTROL	
SETTINGS	LCD DISPLAY
PROTOCOLS	DMX512, RDM & ART-NET
CHANNELS	21 / 22 (DMX) / 144 (VIDEO) / 166 / 206
UPDATES	BY DMX LINK
APPROVALS	
	CE COMPLIANT & ROHS

INSTALLATION	
MOUNTING	OMEGA BRACKETS
ORIENTATION	ANY
PROTECTION RATING	IP20
SAFETY	ATTACHMENT POINT
MOVEMENTS	
PAN	INFINITE
TILT	INFINITE
RESOLUTION	16 BIT
ELECTRICAL SPECIFICATION	
INPUT	100 - 240V, 50/60HZ
POWER CONSUMPTION	580W
ELECTRICAL SPECIFICATION	
MIN. AMBIENT TEMP.	0°C
MAX. AMBIENT TEMP.	35°C
COOLING	LOW NOISE CONTROLLABLE FAN
ORDERING	
CLF STINGER	160110
USER MANUAL, POWER CABLE & 2 OMEGA BRACKETS	

