

SERIUS

MOVING LED BAR




NEW!

- SMOOTH RGBW COLOR MIXING
- 3.5° – 38° ZOOM (2 SEGMENTS)
- BATTERY BACKUP FOR MENU SETTINGS
- 12 INDIVIDUALLY CONTROLLABLE LEDs
- 220° TILT ANGLE



CLF Serius is a moving LED bar with a length of 1 meter. It comes with 12 high power RGBW LEDs which can be controlled individually. The zoom range of the Serius is divided in two segments which can be moved independently from 3,5° to 38°.

The shape of the CLF Serius makes sure that the LEDs will have even spacing when multiple fixtures are combined. This creates a seamless light curtain. The bar can be tilted precisely and smoothly by 220°.

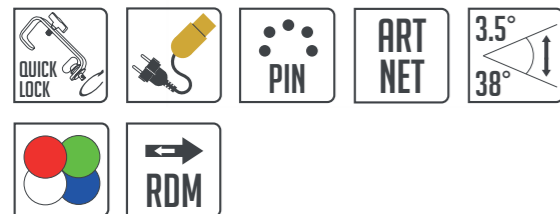

POWER

INPUT VOLTAGE	100 - 240 VAC, 50/60HZ
STANDBY POWER	31W
TOTAL POWER CONSUMPTION	450W
TYPICAL CURRENT	1.9A
POWER PLUG TYPE	SEETRONIC POWERCON TRUE

SOURCE

LAMP	OSRAM LE RTDUW S2WN
EXPECTED LIFETIME	30.000 HOURS

PHOTOMETRIC

OUTPUT 3.5° @1M	275225 LUX
OUTPUT 3.5° @5M	11009 LUX

EFFECTS

DIMMING	0 - 100%
TILT	220°

HARDWARE

INTERFACE	OLED DISPLAY
SOFTWARE UPLOAD	VIA DMX INPUT

HEAT MANAGEMENT

COOLING TYPE	REGULATED FANS
MAX. AMBIENT TEMP.	TA MAX=40°C
MIN. AMBIENT TEMP.	TA MIN=0°C
MAX. SURFACE TEMP.	65°C

CONTROL

CONTROL PROTOCOL	ARTNET, RDM READY & DMX512
DMX CHANNELS	14, 57
RDM	YES
DMX INPUT CONNECTION	3-PIN AND 5-PIN XLR

INSTALLATION

IP RATING	IP22
ORIENTATION	ANY

HOUSING

SAFETY ATTACHMENT POINT	YES
-------------------------	-----

PHYSICAL

NET PRODUCT WEIGHT	17KG
LENGTH	1000MM
WEIGHT	113MM
HEIGHT	278MM

INCLUDED ITEMS

MANUAL, POWER CABLE, OMEGA BRACKETS

APPROVALS

APPROVED CERTIFICATIONS	CE AND ROHS
-------------------------	-------------

INFORMATION

ARTICLE NUMBER	156650
EAN CODE	8719189163902

OPTIONAL
FLIGHTCASE & HANGING BRACKET